



CABLES

1. Multi-core PVC insulated copper cable

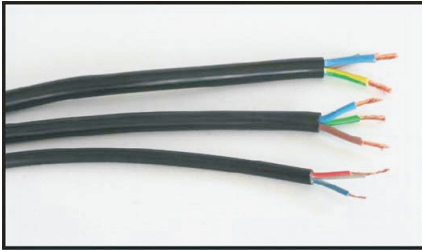


- Temperature rating (90°C)
Sizes:
• 1.5 mm² rated @ 15A
• 2.5 mm² rated @ 30A
• 4.0 mm² rated @ 40A

2. Multi-core silicone rubber insulated copper cable

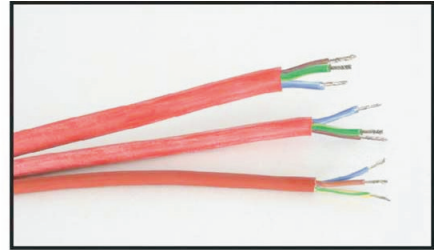


- Temperature rating (200°C)
Sizes:
• 1.5 mm² rated @ 15A
• 2.5 mm² rated @ 30A
• 4.0 mm² rated @ 40A

3. Multi-core NFG stainless steel braided cable (copper nickel plated core)

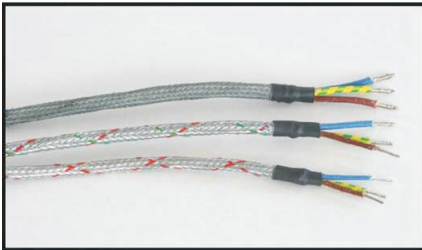

- Temperature rating (350°C)
Sizes:
• 0.75 mm² rated @ 8A
• 1.5 mm² rated @ 10A
• 2.5 mm² rated @ 15A

4. Single-core high temperature NFG cable (pure nickel core)

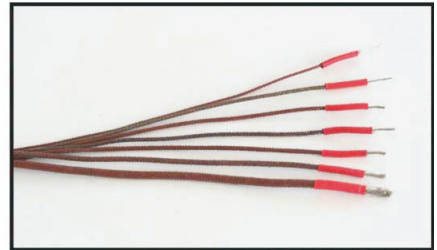


- Temperature rating (350°C)
Sizes:
• 0.2 mm² rated @ 2A
• 0.5 mm² rated @ 3A
• 0.75 mm² rated @ 5A
• 1.0 mm² rated @ 10A
• 1.5 mm² rated @ 15A
• 2.5 mm² rated @ 20A
• 4.0 mm² rated @ 25A
• 6.0 mm² rated @ 30A

5. Thermocouple, Fg insulated compensating cable



- Temperature rating (350°C)
• Available in type J, K, T, R, S
Sizes:
• 2 x 0.22 mm² • 2 x 0.50 mm²

6. Thermocouple, RTD silicone insulated compensating cable

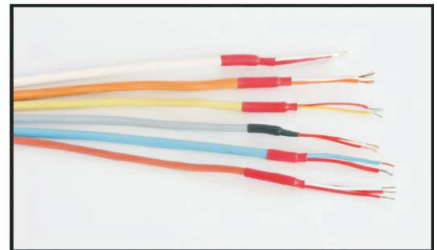


- Temperature rating (200°C)
• Available in type J, K, T, RTD, R, S
Sizes:
• 3 x 0.50 mm² • 2 x 0.50 mm²
• 4 x 0.50 mm² (K only)
• 6 x 0.50 mm² (K only)

7. Thermocouple, RTD stainless steel Fg insulated compensating cable




- Temperature rating (350°C)
• Available in type J, K, T, RTD, R, S
Sizes:
• 2 x 0.22 mm² • 2 x 1.00 mm²
• 2 x 0.50 mm² • 3 x 0.50 mm²
• 3 x 0.22 mm²

8. Thermocouple, RTD teflon insulated compensating cable

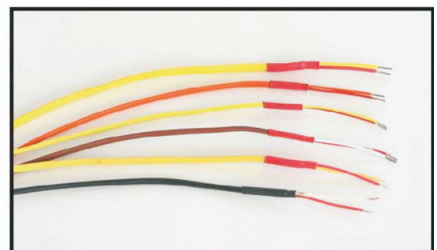

- Temperature rating (200°C)
• Available in type J, K, T, RTD, R, S
Sizes:
• 2 x 0.50 mm² • 2 x 0.22 mm²
• 3 x 0.50 mm² • 4 x 0.50 mm²

9. Thermocouple, RTD PVC insulated compensating cable

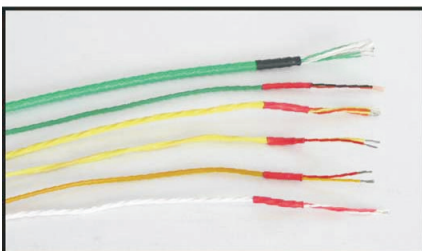

- Temperature rating (90°C)
• Available in type J, K, T, RTD, R, S
Sizes:
• 3 x 0.22 mm² • 2 x 0.22 mm²
• 2 x 0.50 mm²